



zetaecotech
INNOVATIVE NURSERY TECHNOLOGIES

by **Electrozeta**

San Giorgio della Richinvelda (PN) - www.zetaecotech.it

WATER COOLING SYSTEM HECO-A-COOLER-160


The **HECO-A-COOLER** water tank is designed for **waxed vine plants bundles cooling** and **residue wax recovery**.

The system consists of a stainless steel Tank divided into 2 areas: the bigger one is for vine plants cooling and has a capacity of 115 liters, while the smaller one is for filtering and cleaning and has a capacity of 50 liters.


Thanks to the closed-loop pumping system and to the water filtering system, the remaining wax settles in a collection filter placed on the smallest tank. In this way, the water in the bigger tank is always clean, preventing the wax residues from sticking to the next vine plants that will be processed. Moreover, this systems allows to recover the excess wax for later reuse, making this processing stage more efficient and cost-effective.

AVAILABLE VERSIONS:

GENERAL LAYOUT: HECO-A-COOLER-160

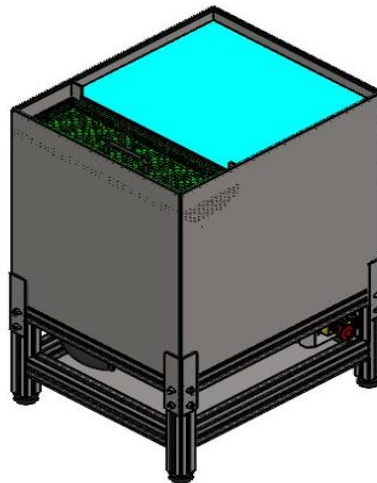

DIMENSIONS:

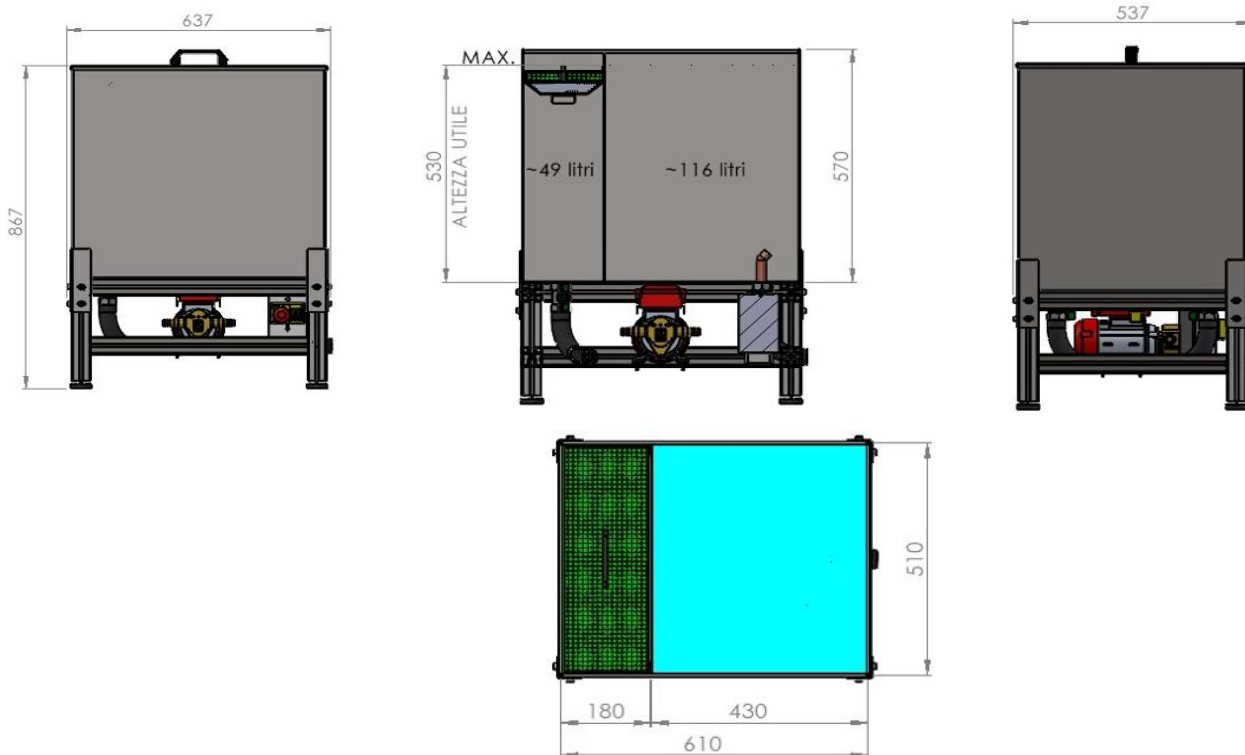

ELECTROZETA S.R.L.

Via Kechler,12 - 33095 - San Giorgio della Richinvelda - (PN)

VAT Number 01125950939

Tel. 0427.96090 - e-mail: info@electrozeta.it - commerciale@electrozeta.it - PEC: electrozeta@legalmail.it - www.zetaecotech.it

WATER COOLING SYSTEM HECO-A-COOLER-160

Latest Update: 07/08/2023

MAIN TECHNICAL FEATURES:	HECO-A-COOLER-160
PRICE FOR YOUR ATTENTION:	
OPERATING MODE:	System made of one tank divided into one 115 Lt. working area and one 50 Lt. filtering area Closed-loop water recirculation pump Residual wax filtering by means of a basket filter placed on the small tank
TANK DIMENSIONS:	L. 610 x W. 510 x H. 570 mm
TANK CAPACITY:	165 Liters. (115+50)
TOTAL ELECTRICAL POWER:	500 W
POWER SUPPLY:	Single-phase 230V 2P+T
TOTAL DIMENSIONS AND WEIGHT:	L 640 x W 540 x H 870 mm - Machine Weight:70 Kg
BUILDING MATERIALS TANK:	Stainless steel AISI 304
BUILDING MATERIALS BASKET FILTER:	Stainless steel AISI 304, with holes Ø 2 mm
BUILDING MATERIALS SUPPORTING FRAME:	Profiled aluminium frame
BUILDING MATERIALS PIPEWORK:	PVC
PUMP FEATURES:	Maximum Flowrate: 160 liters/min Hydraulic head: 5 meters
STANDARD EQUIPMENT:	Recirculation pump; Pump Protection and Manual control Device. Extractable water filter for Wax recovery.
OPTIONAL:	PT100 probe for temperature control: Electronic system for Minimum level control.
TECHNICAL LEGISLATIONS:	Built according to the European Machinery Directory - EC Certified

ELECTROZETA S.R.L.

Via Kechler,12 - 33095 - San Giorgio della Richinvelda - (PN)

VAT Number 01125950939

Tel. 0427.96090 - e-mail: info@electrozeta.it - commerciale@electrozeta.it - PEC: electrozeta@legalmail.it - www.zetaecotech.it